


SEACURTAIN™


**KEPNER PLASTICS
FABRICATORS, INC.**

REELPAK™

BOOM SYSTEM

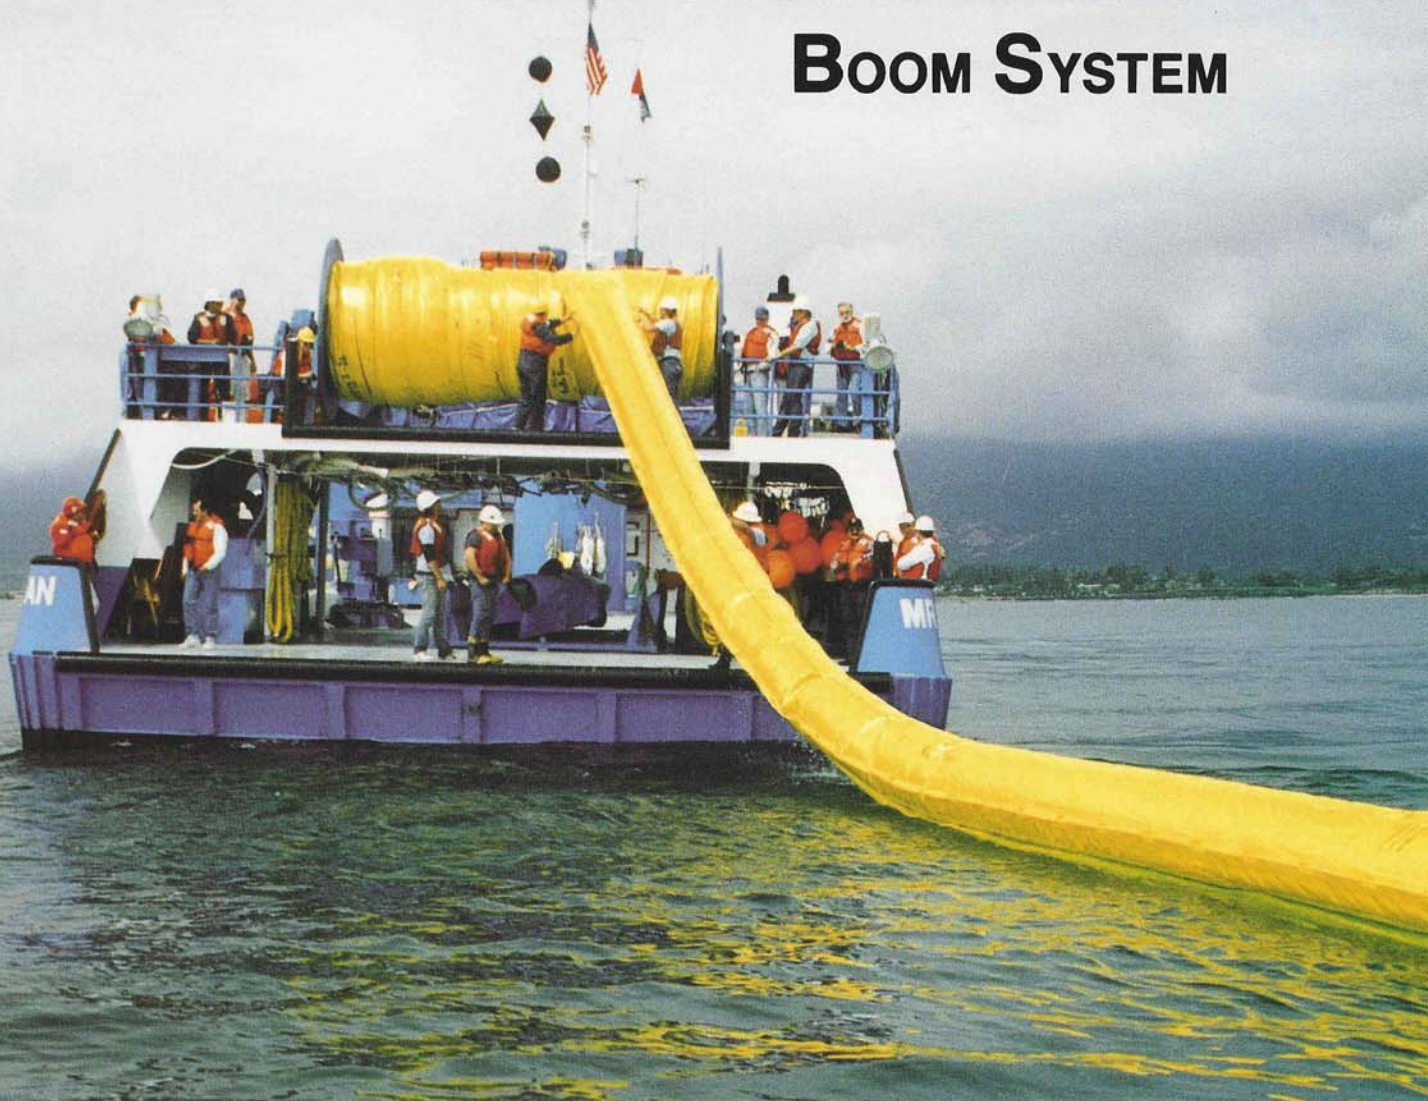

- **FAST**
 - **EFFECTIVE**
 - **DURABLE**
- SELF-INFLATING DEPLOYMENT
 - SELF-COMPACTING RECOVERY
 - UNSINKABLE - POSITIVE BUOYANCY
 - ONE/TWO MAN OPERATION
 - IMMEDIATELY REUSABLE
 - COMPACT STORAGE

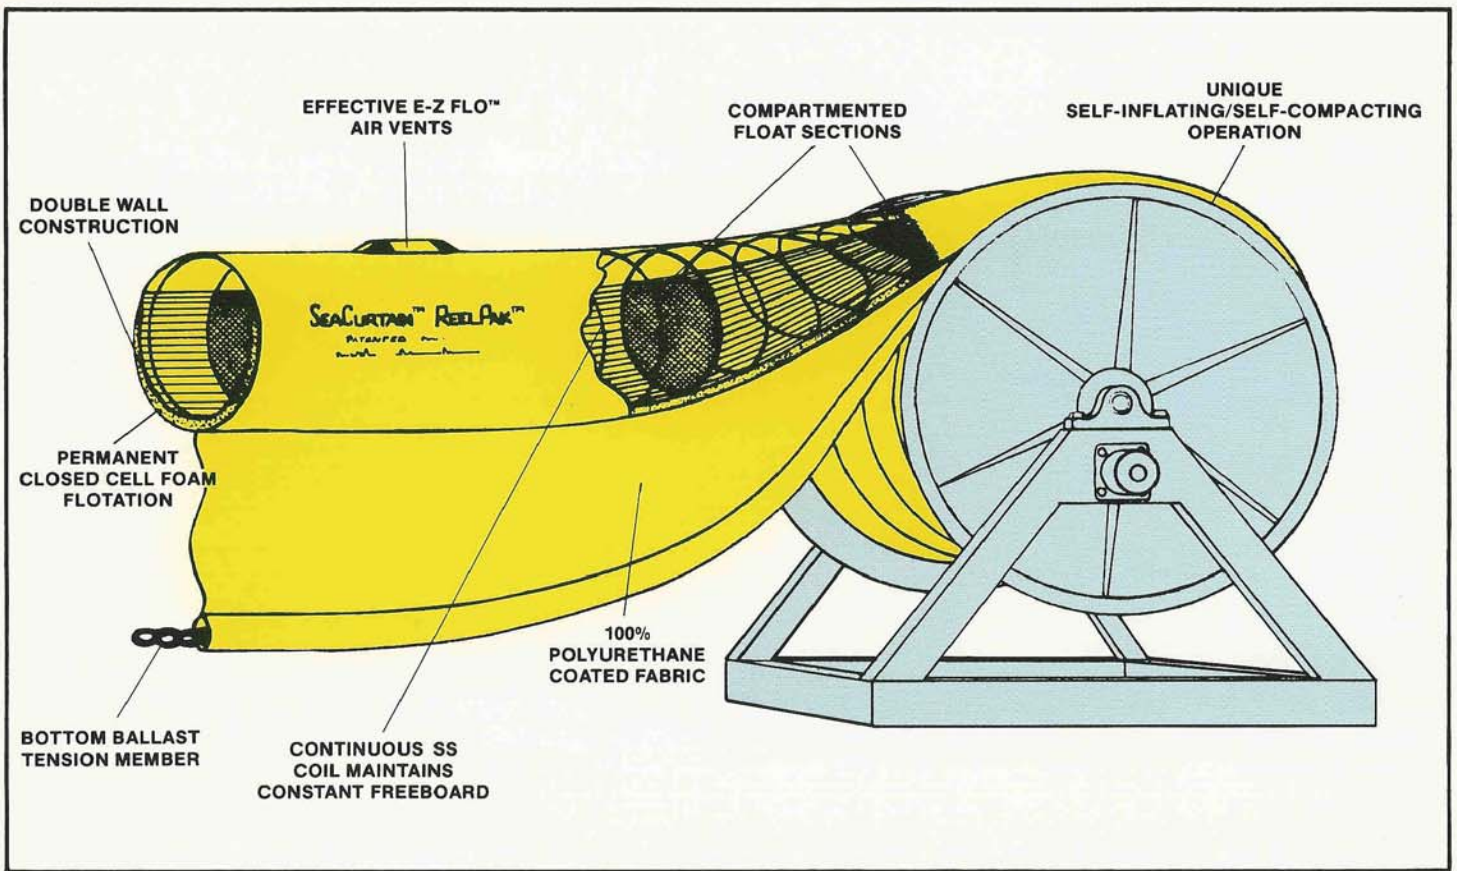

ReelPak Boom Specifications

Boom Service	Inland/Choppy	Open Harbor	Light Ocean	Offshore	Hi-Seas 600	Hi-Seas 800
Model Number	BPHD812RP	BPHD1115RP	BPHD1418RP	BPHD1823RP	SPHD2430RPM	SPHD3242RPM
Float Diameter	8" (20 cm)	11" (28 cm)	14" (36 cm)	18" (46 cm)	24" (61 cm)	32" (81 cm)
Nominal Freeboard	7" (18 cm)	10" (25 cm)	13" (33 cm)	16" (41 cm)	22" (56 cm)	30" (76 cm)
Nominal Draft	13" (33 cm)	16" (41 cm)	20" (51 cm)	26" (66 cm)	35" (88 cm)	44" (112 cm)
Buoyancy/ft (m)	22 lbs. (33 kg)	41 lbs. (63 kg)	67 lbs. (98 kg)	110 lbs. (164 kg)	195 lbs (291 kg)	345 lbs (514 kg)
Weight/ft (m)	1.7 lbs. (2.5 kg)	2.7 lbs. (3.9 kg)	3.4 lbs. (4.9 kg)	5.1 lbs (6.6 kg)	8.5 lbs (11.9 kg)	11.5 lbs. (17.2 kg)
Storage Vol./ft (m)	.11 ft ³ (.010 m ³)	.21 ft ³ (.019 m ³)	.28 ft ³ (.026 m ³)	.41 ft ³ (.038 m ³)	.53 ft ³ (.049 m ³)	.97 ft ³ (.090 m ³)
Tensile Strength*	25.5 lbs. (11.6 kg)	36.5 lbs. (16.6 kg)	47 lbs. (21.4 kg)	61.5 lbs. (28 kg)	74 lbs. (33.6 kg)	120 lbs. (54.5 kg)
Oper. Temp. Range	-65° to +170°F (-54° to +77°C) on all models.					
Fabric Coating	100% Kepelastex™ Polyurethane on all models.					

Above values are standard for models shown. Alternative models are available upon request.

* Values in thousands. Ultimate tensile strength as high as stated values depending upon options. Use appropriate safety factor.

NEW Hi-Seas 1100 (MODEL SPVHD4258RPM, APPROX. 30% LARGER THAN Hi-Seas 800) WILL BECOME AVAILABLE IN 1993.

SCR-1292

KEPNER PLASTICS
FABRICATORS, INC.

3131 Lomita Boulevard • Torrance • California 90505
 (310) 325-3162 FAX: (310) 326-8560